



Your source for high quality, affordable lasers

DATA SHEET

LD PUMPED ALL-SOLID-STATE RED LASER AT 660nm


All solid state 660 nm red laser is made features of ultra-compact, long lifetime, low cost and easy operating, which is widely used in measurement, spectrum analysis, laser lighting show, etc.



Model: MRL-W-660/1000~2000mW


Wavelength (nm)	660 ± 1nm	
Output Power (mW)	>1000, 1200, 1500, 1800, 2000	
Transverse Mode	Near TEM ₀₀	
Operating Mode	CW	
Power stability (rms, over 4 hours)	<3%, <5%, <10%	
Warm-up time (minutes)	10	
M ² factor	3.0~6.0	
Beam divergence, full angle (mrad)	<2.5	
Beam diameter at the aperture (mm)	~4.0	
Beam height from base plate (mm)	93.5	
Polarization ratio	>100:1	
Operating temperature (°C)	10~35	
Power supply (90-264VAC)	PSU-W-LED	PSU-W-FDA
Modulation option	TTL on/off, 1Hz-1KHz, 1KHz-10KHz, 10KHz-30KHz; and Analog modulation option	
Expected lifetime (hours)	10,000	
Warranty period	1 year	

MxL-W-660

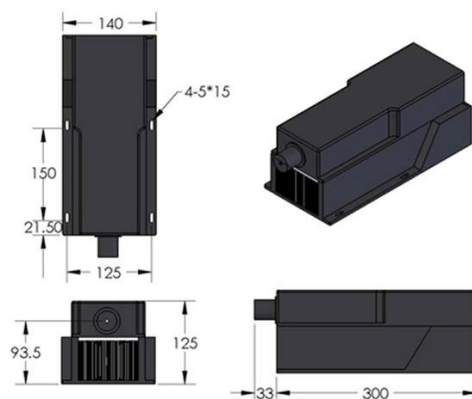


333(L) ×140(W) ×125(H) mm³, 6.1kg

PSU-W-LED

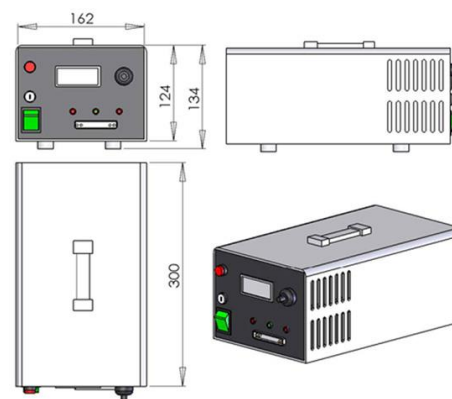

300 (L) ×162(W) ×134 (H) mm³, 5.2kg

PSU-W-FDA

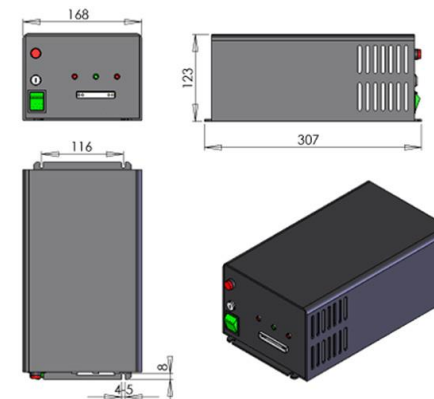

307 (L) ×168(W) ×123 (H) mm³, 5.1kg