

DATA SHEET


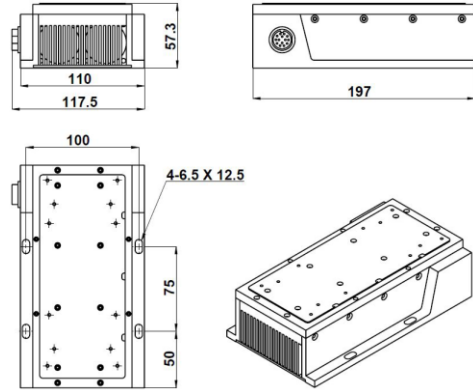


TEMPERATURE CONTROLLED HEATSINK FOR MxL-III/FN LASER

Some of laser heads needs specific heatsink to ensure that it is operating at its best specifications (power stability, noise stability, wavelength/frequency stability, and etc.). The TC-01 heatsink is designed for CNI laser model Mxl-III/FN and can be used to other equipment which has large dependence on temperature.



Temperature Controlled Heatsink / TC-01

Model	TC-01
Material	Al
Operating temperature	15°C~35°C
Accuracy	±0.5°C; ±1°C
Temperature-controlled area dimensions	180mm x 80mm
Power consumption	20~100W, depends on room temperature and heat of object.
Power supply (100-240VAC)	PSU-H-LED
Warranty period	1 year

TC-01 Heatsink	Heatsink Dimensions	PSU-H-LED	PSU Dimensions
	 <p>197(L) ×117.5(W) ×57.3(H) mm³, 1.6kg</p>		 <p>277 (L) ×145(W) ×106 (H) mm³, 2.6kg</p>